



LMK 458



Hydrostatic Probe for Marine and Offshore

Ceramic Diaphragm

accuracy:
0.25 % FSO IEC 60770

Hydrostatic Probe

LMK 458

Product characteristics

- ▶ nominal pressure ranges from 0 ... 40 cmH₂O up to 0 ... 200 mH₂O
- ▶ diameter 39.5 mm
- ▶ permissible temperatures up to 125 °C
- ▶ high overpressure resistance
- ▶ chemical resistance
- ▶ high long-term stability

Optional versions

- ▶ diaphragm Al₂O₃ 99.9 %
- ▶ different housing materials (stainless steel, CuNiFe)
- ▶ IS-version zone 0
- ▶ screw-in and flange version
- ▶ accessories e. g. assembling and probe flange, mounting clamp

The hydrostatic probe **LMK 458** has been developed for measuring level in service and storage tanks and is as a consequence of the certification by Germanischer Lloyd predestined for shipbuilding and offshore applications.

A permissible operating temperature of up to 125 °C and the possibility to use the device in intrinsic safe areas enable to measure the pressure of various fluids under extreme conditions. The basis for the **LMK 458** is a capacitive ceramic sensor element, which offers a high overload resistance and medium compatibility.

Preferred areas of use are

Water



Drinking water abstraction
Desalinization plant

Shipbuilding / Offshore




Ballast tanks
Draught monitoring
Level measurement in ballast and storage tanks



Pressure ranges																
Nominal pressure ¹	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	20
Level	[mH ₂ O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	200
Overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35	45	45
Permissible vacuum	[bar]	-0.2		-0.3		-0.5				-1						
¹ available in gauge, sealed gauge and absolute; nominal pressure ranges sealed gauge and absolute from 1 bar																
Output signal / Supply		Standard														
		2-wire: 4 ... 20 mA / V _S = 11 ... 32 V _{DC}									V _{S rated} = 24 V _{DC}					
Option IS-version		2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}									V _{S rated} = 24 V _{DC}					
Performance		Accuracy ²														
		standard: ≤ ± 0.25 % FSO														
		option for P _N ≥ 0.6 bar ³ : ≤ ± 0.1 % FSO														
Permissible load		R _{max} = [(V _S - V _{S min}) / 0.02] Ohm														
Long term stability		<= 0.1 % FSO / year														
Influence effects		supply: 0.05 % FSO / 10 V									permissible load: 0.05 % FSO / kOhm					
Turn-on time		700 msec														
Mean response time		< 200 msec									mean measuring rate 5/sec					
Max. response time		380 msec														
		² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)														
		³ Under the influence of disturbance burst according to EN 61000-4-4 (2004) +2 kV accuracy decreased to <=± 0.25 % FSO.														
Thermal effects / Permissible temperatures		Thermal error														
		<= 0.1 % FSO / 10 K in compensated range -20 ... 80 °C														
Permissible temperatures		medium / electronics / environment: -25 ... 125 °C (depending on cable sheath / seal) storage: -40 ... 100 °C														
Electrical protection ⁴		Short-circuit protection														
		permanent														
Reverse polarity protection		no damage, but also no function														
Electromagnetic compatibility		emission and immunity according to														
		<ul style="list-style-type: none"> - EN 61326 - Germanischer Lloyd (GL) - Det Norske Veritas (DNV) 														
		⁴ additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available														
Mechanical stability		Vibration														
		4 g (according to GL: curve 2 / according to DNV: Class B / basis: DIN EN 60068-2-6)														
Electrical connection		Cable outlet														
		shielded cable with integrated air tube for atmospheric reference (for nominal pressure ranges sealed gauge and absolute, the air tube is plugged)														
Materials		Housing														
		standard: stainless steel 1.4571 (316Ti) option: CuNi10Fe1Mn (resistant against sea water) others on request														
Seals (media wetted)		standard: FKM options: EPDM, FFKM (min. permissible temperature from -15 °C); others on request														
Diaphragm		standard: ceramics Al ₂ O ₃ 96 % option: ceramics Al ₂ O ₃ 99.9 % - for pressure ranges 0.1 up to 1 bar (absolute on request)														
Cable sheath		standard: TPE, dark blue (resistant against sea water, halogen free) option: FEP, black (resistant against sea water) - max. permissible temperature up to 80 °C others on request														
Miscellaneous		Cable protection														
		stainless steel pipe for probe in stainless steel: available as compact product (standard: stainless steel pipe with a total length up to 2 m possible; other lengths on request)														
Ingress protection		IP 68														
Current consumption		max. 21 mA														
Weight		min. 650 g (without cable)														
CE-conformity		EMC Directive: 2004/108/EC														
Option Pt 100 temperature element (only with standard version)		Temperature range														
		-25 ... 125 °C														
Connection temperature element		3-wire														
Resistance		100 Ohm at 0 °C														
Temperature coefficient		3850 ppm/K														
Supply I _S		0.3 ... 1.0 mA DC														

IS-protection	
Approval DX14D-LMK 458	zone 0: II 1 G Ex ia IIB T4 zone 20: II 1 D IP6X T=85°C
Safety technical maximum values	$U_i = 28\text{ V}$, $I_i = 93\text{ mA}$, $P_i = 660\text{ mW}$, $C_i = 105\text{ nF}$; $L_i = 5\text{ }\mu\text{H}$; 140 nF opposite GND
Permissible temperatures for environment	in zone 0 ⁵ : -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 70 °C
Connecting cables (by factory)	cable capacity: signal line/shield as well as signal line/signal line: 160 pF/m cable inductance: signal line/shield as well as signal line/signal line: 1 $\mu\text{H}/\text{m}$
⁵ for optional stainless steel pipe the following designation is valid: "II 1 G Ex ia IIC T4" (zone 0)	
Wiring diagrams	
<p>2-wire-system (current)</p>	<p>2-wire-system (current) with Pt 100</p>
Pin configuration	
Electrical connection	cable colours (DIN 47100)
Supply V_s+ Supply V_s-	wh (white) bn (brown)
Option Pt 100 Temperature element:	
Supply T+ (with Pt 100)	ye (yellow)
Supply T- (with Pt 100)	gr (grey)
Supply T- (with Pt 100)	pn (pink)
Shield	gn/ye (green / yellow)
Dimensions (in mm)	
probe version	
<p style="text-align: center;">stainless steel / CuNiFe</p>	<p style="text-align: center;">prepared for mounting with stainless steel pipe</p>

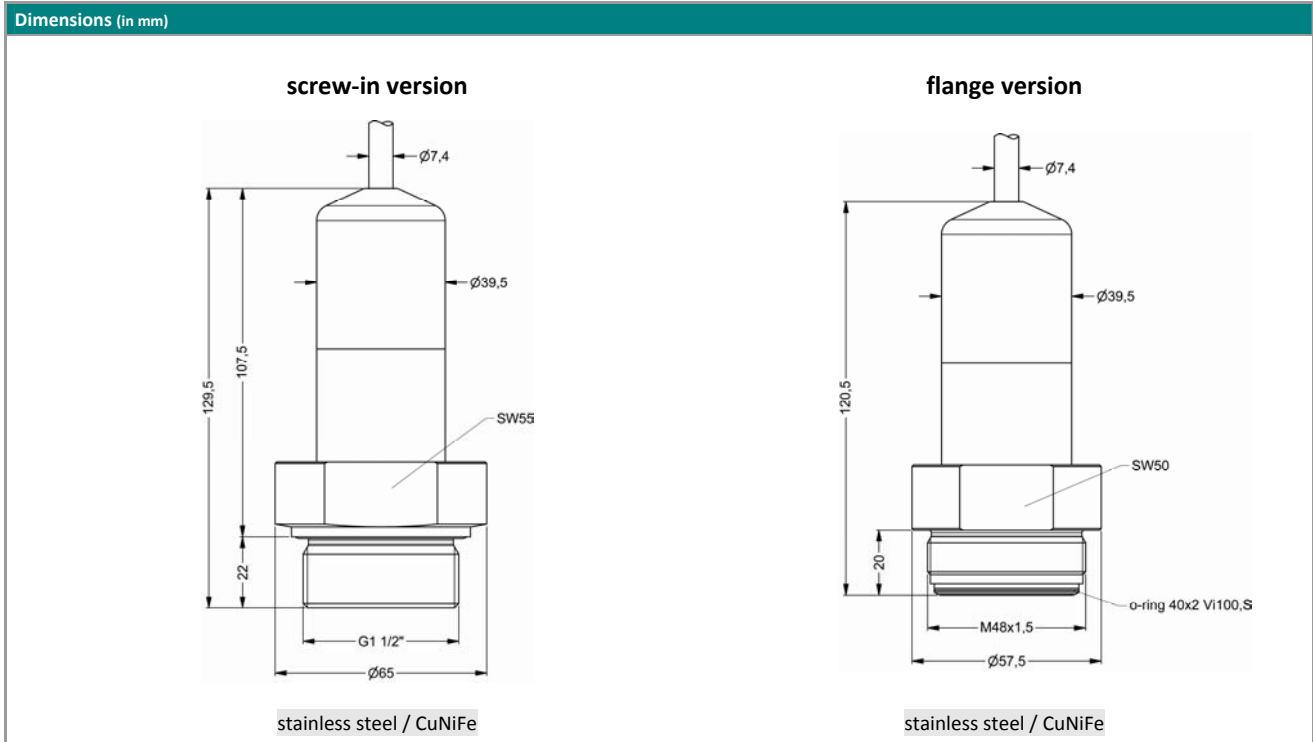

Accessories:

Probe flange for flange version	
Technical Data	
Suitable for	LMK 382, LMK 382H, LMK 458
Flange material	stainless steel 1.4571 (316Ti)
Hole pattern	according to DIN 2507
Version	Size (in mm)
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18
Ordering type	
Probe flange DN25 / PN40	
Probe flange DN50 / PN40	
Probe flange DN80 / PN16	

Assembling flange with cable gland	
Technical Data	
Suitable for	all probes
Flange material	stainless steel 1.4571 (316Ti)
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic
Seal insert	material: TPE (ingress protection IP 68)
Hole pattern	according to DIN 2507
Version	Size (in mm)
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18
Ordering type	
Assembling Flange DN25 / PN40	
Assembling Flange DN50 / PN40	
Assembling Flange DN80 / PN16	

cable gland M16x1.5 with seal insert (for cable-Ø 4 ... 11 mm)

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.