



DMK 351

Pressure Transmitter

Ceramic Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO

Pressure Transmitter

DMK 351

Nominal pressure:

from 0 ... 40 mbar
up to 0 ... 20 bar

Output signal:

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V
others on request

Product characteristics:

- ▶ high media resistance

Optional versions:

- ▶ IS-version
Ex ia = intrinsically safe for
gases and dusts
- ▶ diaphragm 99.9 % Al₂O₃
- ▶ customer specific versions



The pressure transmitter DMK 351 has been specially designed for applications in plant and machine engineering as well as laboratory techniques and is suitable for measuring small system pressure and filling heights.

By using our own-developed capacitive sensor, optionally available as Al₂O₃ 99.9 %, the DMK 351 offers a high overpressure resistance and a high temperature and media resistance.

An intrinsically safe version completes the range of possibilities.

Preferred areas of use are:



Plant and Machine Engineering



Laboratory Techniques

Preferred used for:



Fuel and Oil




Water


Pressure ranges																
Nominal pressure	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	20
Level	[mH ₂ O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	200
Overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35	45	45
Low pressure	[bar]	-0.2		-0.3		-0.5			-1							
Output signal / Supply																
Standard		2-wire: 4 ... 20 mA / V _S = 9 ... 32 V _{DC}														
Option IS-protection		2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC} Option 3-wire: 0 ... 10 V / V _S = 12.5 ... 32 V _{DC}														
Performance																
Accuracy ¹		standard: ≤ ± 0.35 % FSO option for P _N ≥ 0.6 bar: ≤ ± 0.25 % FSO														
Permissible load		current 2-wire R _{max} = [(V _S - V _{Smin}) / 0.02] Ω voltage 3-wire: R _{min} = 10 kΩ														
Influence effects		supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ														
Long term stability		≤ ± 0.1 % FSO / year														
Turn-on time		700 msec														
Mean measuring rate		5/sec														
Response time		mean response time: < 200 msec										max. response time: 380 msec				
¹ accuracy according to IEC 60770 - limit point adjustment (non-linearity, hysteresis, repeatability)																
Thermal errors (Offset and Span)																
Tolerance band		≤ ± 0.1 % FSO / 10 K in compensated range -20 ... 80 °C														
Permissible temperatures																
Permissible temperatures		medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C														
Electrical protection																
Short-circuit protection		permanent														
Reverse polarity protection		no damage, but also no function														
Electromagnetic compatibility		emission and immunity according to EN 61326														
Mechanical stability																
Vibration		10 g RMS (20 ... 2000 Hz) according to DIN EN 60068-2-6														
Shock		100 g / 1 msec according to DIN EN 60068-2-27														
Materials																
Pressure port		stainless steel 1.4404 (316L)														
Housing		stainless steel 1.4404 (316L)														
Option compact field housing		stainless steel 1.4305 (303) with cable gland brass, nickel plated										others on request				
Seal (media wetted)		FKM: -40 ... 125 °C EPDM: -40 ... 125 °C														
Diaphragm		standard: ceramics Al ₂ O ₃ 96 % option: ceramics Al ₂ O ₃ 99.9 %														
Media wetted parts		pressure port, seals, diaphragm														
IS-protection (only for 4 ... 20 mA / 2-wire)																
Approval DX 14-DMK 351		Male (connector)-version: zone 0: II 1 G EEx ia IIC T4 zone 20: II 1 D EEx IP6X T=85°C cable-version: zone 0: II 1 G EEx ia IIB T4 zone 20: II 1 D EEx IP6X T=85°C														
Safety technical maximum values		U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i = 27 nF, L _i = 5 μH														
Max. permissible temperature for environment		in zone 0: -20 ... 60 °C for p _{atm} 0.8 bar up to 1.1 bar in zone 1 and higher: -25 ... 70 °C														
Connecting cables (by factory)		capacity: signal line / shield also signal line / signal line: 160 pF/m inductance: signal line / shield also signal line / signal line: 160 pF/m														
Miscellaneous																
Installation position		any														
Current consumption		signal output current: max. 21 mA signal output voltage: max. 5 mA														
Weight		min. 200 g														
Operational life		> 100 x 10 ⁶ loading cycles														
CE-conformity		EMC-directive: 2004/108/EC														
ATEX Directive		94/9/EC														

Wiring diagram

2-wire-system (current)



3-wire-system (current / voltage)

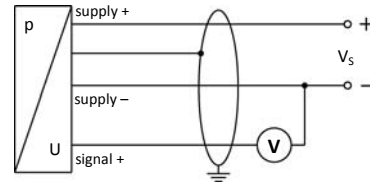

Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal +	3	1	3	OUT +	gn (green)
Shield	ground contact	5	4	⏏	gn/ye (green / yellow)


Electrical connections (dimensions in mm)

² standard: 2 m PVC-cable without ventilation tube (permissible temperature: -5 ... 70°C), optional cable with ventilation tube



³ different cable types and lengths available, permissible temperature depends on kind of cable

Dimensions (in mm)

standard

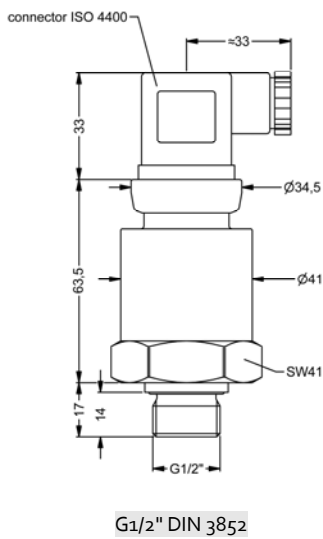

option



This data sheet contains product specification, properties are not guaranteed. Subject to change with notice.



DMK 351

DMK 351

□□□ - □□□□ - □ - □ - □□□ - □□□ - □ - □ - □ - □□□

Messgröße							
	in bar, relativ	2	9	0			
	in bar, absolut	2	9	1			
	in bar, sealed gauge						auf Anfrage
	in mH ₂ O, relativ	2	9	2			
	in mH ₂ O, absolut	2	9	3			auf Anfrage
	in mH ₂ O, sealed gauge						auf Anfrage
Eingang		[mH ₂ O]	[bar]				
	0,4	0,04		0	4	0	0
	0,6	0,06		0	6	0	0
	1,0	0,10		1	0	0	0
	1,6	0,16		1	6	0	0
	2,5	0,25		2	5	0	0
	4,0	0,40		4	0	0	0
	6,0	0,60		6	0	0	0
	10	1,0		1	0	0	1
	16	1,6		1	6	0	1
	25	2,5		2	5	0	1
	40	4,0		4	0	0	1
	60	6,0		6	0	0	1
	100	10		1	0	0	2
	160	16		1	6	0	2
	200	20		2	0	0	2
	Sondermessbereiche			9	9	9	9
							auf Anfrage
Ausgang							
	4 ... 20 mA / 2-Leiter			1			
	0 ... 10 V / 3-Leiter			3			
	Ex-Schutz 4 ... 20 mA / 2-Leiter			E			
	andere			9			auf Anfrage
Genauigkeit							
	Standard	0,35 %		3			
	Option für P _N ≥ 0,6 bar:	0,25 %		2			
	andere			9			auf Anfrage
Elektrischer Anschluss							
	Stecker und Kabeldose ISO 4400			1	0	0	
	Stecker Binder Serie 723 (5-polig)			2	0	0	
	Kabelausgang mit PVC-Kabel			T	A	0	
	Kabelausgang mit Kabel			T	R	0	
	Stecker M12x1 (4-polig) / Metall			M	1	0	
	Kompakt-Feldgehäuse						
	Edelstahl 1.4305			8	5	0	
	andere			9	9	9	auf Anfrage
Mechanischer Anschluss							
	G1/2" DIN 3852			1	0	0	
	G1/2" EN 837			2	0	0	
	1/2" NPT			N	0	0	
	andere			9	9	9	auf Anfrage
Dichtung							
	FKM			1			
	EPDM			3			
	andere			9			auf Anfrage
Druckanschluss							
	Edelstahl 1.4404			1			
	andere			9			auf Anfrage
Trennmembrane							
	Keramik Al ₂ O ₃ 96%			2			
	Keramik Al ₂ O ₃ 99,9 %			C			
	andere			9			auf Anfrage
Sonderausführungen							
	Standard				0	0	0
	andere				9	9	9
							auf Anfrage

¹ Standard: 2 m PVC-Kabel ohne Belüftungsschlauch (Temperateureinsatzbereich: -5 ... 70 °C), optional Kabel mit Belüftungsschlauch

Die Angaben dieser Preisliste enthalten die Spezifikation der Produkte, nicht die Zusage von Eigenschaften. Ausführliche Informationen zu den Bestelloptionen können dem Datenblatt entnommen werden. Technische Änderungen vorbehalten.