



# DMK 457

## Pressure Transmitter For Ship- building And Offshore Ceramic Sensor

accuracy according to IEC 60770: 0.5 % FSO

Shipbuilding and Offshore

DMK 457

**Nominal pressure:**

from 0 ... 400 mbar  
up to 0 ... 600 bar

**Output signals:**

2-wire: 4 ... 20 mA  
others on request

**Special characteristics:**

- ▶ shipping approvals  
GL (Germanischer Lloyd) and  
DNV (Det Norske Veritas)
- ▶ pressure port CuNiFe  
(sea water resistant)
- ▶ oxygen application

**Optional versions:**

- ▶ IS-version  
Ex ia = intrinsically safe for  
gases and dusts



The pressure transmitter **DMK 457** with ceramic sensor has been designed for hard conditions especially in shipbuilding and offshore applications as alternative to our pressure transmitter DMP 457 with piezoresistive stainless steel sensor.

In order to meet the special requirements for shipbuilding and offshore applications extensive tests had to be passed to get the Germanischer Lloyd (GL) and Det Norske Veritas (DNV) approvals.

With mechanical versions G1/2" open port and G1/2" flush DIN 3852 the **DMK 457** is especially suited for viscous, pasty or contaminated media due of the ceramic sensor.

**Preferred areas of use are:**



- Drives
- Compressors
- Boiler
- Pneumatic Control Systems
- Oxygen Applications



Fuel and Oil



Water and Sea Water

Input pressure range																		
Nominal pressure gauge [bar]	-1 ... 0	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600
Nominal pressure abs. [bar]	-	-	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600
Level gauge / abs. [mH <sub>2</sub> O]	-	-	6	10	16	25	40	60	100	160	250	400	600	-	-	-	-	-
Overpressure [bar]	4	1	2	2	4	4	10	10	20	40	40	100	100	200	400	400	600	800
Burst pressure ≥ [bar]	7	2	4	4	5	5	12	12	25	50	50	120	120	250	500	500	650	880
Vacuum resistance	P <sub>N</sub> ≥ 1 bar: unlimited vacuum resistance P <sub>N</sub> < 1 bar: on request																	

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V <sub>S</sub> = 8 ... 32 V <sub>DC</sub>
Option IS-protection	2-wire: 4 ... 20 mA / V <sub>S</sub> = 10 ... 28 V <sub>DC</sub>

Performance	
Accuracy <sup>1</sup>	IEC 60770: ≤± 0.5 % FSO
Permissible load	R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A]Ω
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ
Response time	< 10 msec
<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)	

Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error	≤± 0.2 % FSO / 10 K in compensated range -25 ... 85 °C
Permissible temperatures	medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to - EN 61326 - Germanischer Lloyd (GL) - Det Norske Veritas (DNV)

Mechanical stability	
Vibration	4 g (according to GL: curve 2 / according to DNV: Class B / basis: IEC 60068-2-6)

Materials			
Pressure port	Standard:	stainless steel 1.4404 (316L)	
	option <sup>2</sup> :	CuNi10Fe1Mn (sea water resistant) - for P <sub>N</sub> ≤ 400 bar with mech. connection G1/2" DIN 3852, G1/2" EN 837, G1/2" open port, G1/4" DIN 3852, G1/4" EN 837 in combination with housing in CuNi10Fe1Mn	
Housing	standard:	stainless steel 1.4404 (316L)	
	option <sup>2</sup> :	CuNi10Fe1Mn (sea water resistant) - in combination with pressure port in CuNi10Fe1Mn	
	option field housing:	stainless steel 1.4404 (316L); with cable gland	
Cable sheath	for cable outlet	for submersible version	permissible temperatures
	PVC - cable PUR - cable	PVC - probe cable PUR - probe cable FEP - probe cable TPE - probe cable	-5 ... 70 °C -25 ... 70 °C -25 ... 70 °C -25 ... 125 °C
Seals (media wetted)	standard:	FKM	
	option:	NBR, FFKM (only for P <sub>N</sub> ≤ 100 bar)	
	others on request		
Diaphragm	ceramic Al <sub>2</sub> O <sub>3</sub> 96 %		
Media wetted parts	pressure port, seals, diaphragm		


IS-protection (only for 4 ... 20 mA / 2-wire)	
Approval DX19-DMK 457	IBExU10ATEX1068X Zone 0: II 1 G Ex ia IIB T4 Ga Zone 20: II 1 D Ex iaD 20 T85 °C
Safety technical maximum values	U <sub>i</sub> = 28 V, I <sub>i</sub> = 93 mA, P <sub>i</sub> = 660 mW, C <sub>i</sub> = 105 nF, L <sub>i</sub> = 5 μH
Permissible media temperature	in zone 0: -20 ... 60 °C with p <sub>atm</sub> 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1μH/m

Miscellaneous	
Option oxygen application	for $P_N \leq 25$ bar: O-ring in special material with oxygen approval (FKM)
Current consumption	max. 25 mA
Weight	approx. 140 g (with ISO 4400)
Installation position	any
Operational life	$> 100 \times 10^6$ pressure cycles
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A) <sup>3</sup>
ATEX-directive	94/9/EC

<sup>3</sup> This directive is only valid for devices with maximum permissible overpressure  $> 200$  bar

### Wiring diagram


2-wire-system (current)

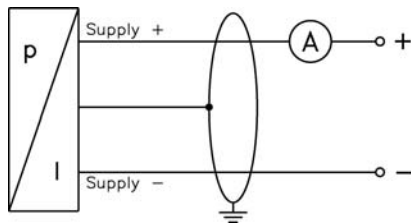

### Pin configuration

Electrical connection	ISO 4400	Field housing	Cable colours (DIN 47100)
Supply +	1	IN +	white
Supply -	2	IN -	brown
Shield	ground pin		yellow / green

### Electrical connections <sup>4</sup> (dimensions in mm)

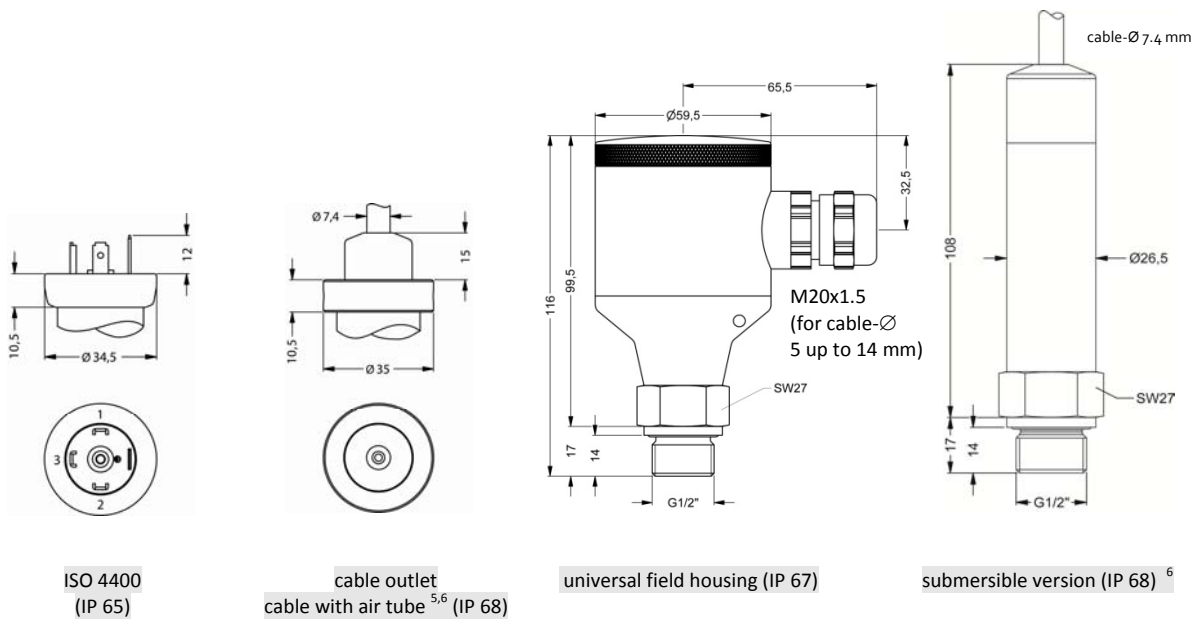


<sup>4</sup> Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.

<sup>5</sup> tested at 4 bar or 40 mH<sub>2</sub>O for 24 hours

<sup>6</sup> different cable types and lengths available, permissible temperature depends on kind of cable, see cable connection


Mechanical connection (dimensions in mm)

Standard

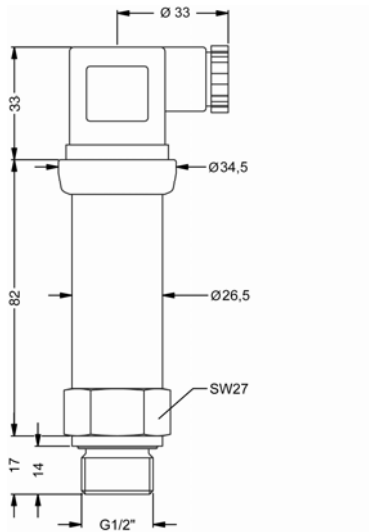


G1/2" DIN 3852


Option




G1/2" EN 837




G 1/4" DIN 3852




G1/4" EN 837



1/2" NPT



1/4" NPT



G1/2" open port DIN 3852  
(up to 40 bar)

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.



**DMK 457**

**DMK 457**

□□□ - □□□□ - □ - □ - □□□□ - □□□□ - □ - □ - □ - □□□□

<b>Messgröße</b>			
in bar, relativ	5	9	0
in bar, absolut	5	9	1
in mH <sub>2</sub> O, relativ	5	9	2
in mH <sub>2</sub> O, absolut	5	9	3
<b>Eingang</b>			
[mH <sub>2</sub> O]	[bar]		
4	0,40	4	0 0 0
6	0,60	6	0 0 0
10	1,0	1	0 0 1
16	1,6	1	6 0 1
25	2,5	2	5 0 1
40	4,0	4	0 0 1
60	6,0	6	0 0 1
100	10	1	0 0 2
160	16	1	6 0 2
250	25	2	5 0 2
400	40	4	0 0 2
600	60	6	0 0 2
100		1	0 0 3
160		1	6 0 3
250		2	5 0 3
400		4	0 0 3
600		6	0 0 3
-1 ... 0		X	1 0 2
Sondermessbereiche		9	9 9 9
<b>Ausgang</b>			
4 ... 20 mA / 2-Leiter		1	
Ex-Schutz 4 ... 20 mA / 2-Leiter		E	
andere		9	
<b>Genauigkeit</b>			
0,5 %		5	
andere		9	
<b>Elektrischer Anschluss</b>			
Stecker und Kabeldose ISO 4400 (für Kabel-Ø 4...6 mm)		G	1 0
Stecker und Kabeldose ISO 4400 GL <sup>1,2</sup> (für Kabel-Ø 10...14 mm)		G	0 0
Stecker und Kabeldose ISO 4400 GL <sup>1,2</sup> (für Kabel-Ø 4,5...11 mm)		G	0 1
Kabelausgang <sup>1,3</sup>		T	R 0
Feldgehäuse Edelstahl		8	8 0
Tauchfähige Ausführung (1.4404)		T	T 0
Tauchfähige Ausführung (CuNiFe)		T	S 0
andere		9	9 9
<b>Mechanischer Anschluss</b>			
G1/2" DIN 3852		1	0 0
G1/2" EN 837		2	0 0
G1/4" DIN 3852		3	0 0
G1/4" EN 837		4	0 0
G1/2" DIN 3852 offener Anschluss		H	0 0
1/2" NPT		N	0 0
1/4" NPT		N	4 0
andere		9	9 9
<b>Dichtung</b>			
FKM		1	
FFKM <sup>4</sup>		7	
Option NBR		5	
andere		9	
<b>Druckanschluss</b>			
Edelstahl 1.4404 (316L)		1	
Kupfer-Nickel-Legierung (CuNi10Fe1Mn) <sup>5</sup>		K	
andere		9	
<b>Trennmembrane</b>			
Keramik Al <sub>2</sub> O <sub>3</sub> 96%		2	
andere		9	
<b>Sonderausführungen</b>			
Standard		0	0 0
Sauerstoff-Ausführung <sup>6</sup>		0	0 7
andere		9	9 9

<sup>1</sup> Es ist generell geschirmtes Kabel zu verwenden! Alle Kabelauführungen werden mit geschirmtm Kabel geliefert.

<sup>2</sup> Kabeldose ist GL-approbiert

<sup>3</sup> Kabel in verschiedenen Ausführungen und Längen lieferbar, Temperatureinsatzbereich abhängig vom Kabel

<sup>4</sup> nur für P<sub>N</sub> ≤ 100 bar möglich

<sup>5</sup> optional für Druckbereiche bis 400 bar und mech. Anschlüssen G1/2" DIN 3852, G1/2" EN 837, G1/2" offener Anschluss,

G1/4" DIN 3852, G1/4" EN 837, in Verbindung mit Gehäuse aus CuNi10Fe1Mn

<sup>6</sup> Sauerstoff-Ausführung mit FKM Dichtung möglich bis 25 bar

Die Angaben dieser Preisliste enthalten die Spezifikation der Produkte, nicht die Zusicherung von Eigenschaften. Ausführliche Informationen zu den Bestelloptionen können dem Datenblatt entnommen werden. Technische Änderungen vorbehalten.