



LPT 541

Industrial Pressure Transmitter with RS485 Modbus RTU

Welded, Dry
Stainless Steel Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure

from 0 ... 16 bar up to 0 ... 1000 bar

Output signal

RS485 with Modbus RTU protocol

Special characteristics

- ▶ media wetted parts of special stainless steel
- ▶ insensitive to pressure peaks
- ▶ high overpressure capability
- ▶ oil and grease free according to ISO 15001 (e.g. for oxygen applications)

Optional version

- ▶ customer specific versions

The industrial pressure transmitter **LPT 541** was especially developed for hydrogen applications and can also be used with other technical gases (e.g. oxygen) and uses the communication protocol Modbus RTU which has found the way in industrial communication as an open protocol. The Modbus protocol is based on a master slave architecture with which up to 247 slaves can be requested by a master.

For hydrogen applications, it is important to use a material that minimizes or prevents hydrogen embrittlement due to its chemical properties.

For oxygen applications, the special cleaning and manufacturing process ensures that residual particles and hydrocarbons are minimized and no reaction can occur during production.

Preferred areas of use are



Technical gases



Hydrogen




Fuel cell



Medical technology



Input pressure range											
Nominal pressure gauge	[bar]	16	25	40	60	100	160	250	400	600	1000
Overpressure	[bar]	50	50	80	120	200	320	500	800	1200	1500
Burst pressure ≥	[bar]	125	125	200	300	500	800	1250	2000	2000	3000 ¹
Vacuum resistance		unlimited									
¹ UL confirmed max. burst pressure 2420 bar											
Output signal											
Digital		RS 485 with Modbus RTU protocol (pressure)									
Supply											
Direct current		V _S = 9 ... 32 V _{DC}									
Performance											
Accuracy ²		≤ ± 0.5 % FSO									
Long term stability		≤ ± 0.1 % FSO / year at reference conditions									
Measuring rate		500 Hz									
Delay time		500 msec									
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)											
Thermal effects (offset and span)											
Thermal error		± 0.2 % FSO / 10 K									
in compensated range		-20 ... 80 °C									
Permissible temperatures											
medium		-40 ... 125 °C									
electronics / environment		-40 ... 85 °C									
storage		-40 ... 100 °C									
Electrical protection											
Short-circuit protection		permanent									
Reverse polarity protection		no damage, but also no function									
Electromagnetic compatibility		emission and immunity according to EN 61326									
Mechanical stability											
Vibration		20 g RMS / 10 ... 2000 Hz				according to DIN EN 60068-2-6					
Shock		500 g / 1 msec half sine				according to DIN EN 60068-2-27					
Materials											
Housing		stainless steel 316L (1.4404)									
Pressure port, sensor, diaphragm		stainless steel 316L (1.4435)									
Seals		none (welded)									
Media wetted parts		pressure port, sensor, diaphragm									
Miscellaneous											
Current consumption		max. 10 mA									
Weight		approx. 140 g									
Installation position		any									
Operational life		p _N ≤ 600 bar: 100 million load cycles p _N > 600 bar: 10 million load cycles									
CE-conformity		EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ³									
³ This directive is only valid for devices with maximum permissible overpressure > 200 bar.											
Purity regarding residual particles / greases											
Oil and grease free version		residual particles:		no particles > 100 µm (based on 10 dm²)							
		residual greases:		residual grease content < 0.2 mg/dm²							

Wiring diagram

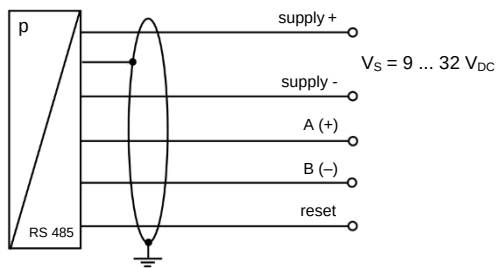


Pin configuration / electrical connection

Electrical connections	M12x1 / metal (5-pin)
Supply +	1
Supply -	3
A (+)	2
B (-)	4
Reset	5
Shield	plug housing




Mechanical connections (dimensions mm / in)

standard

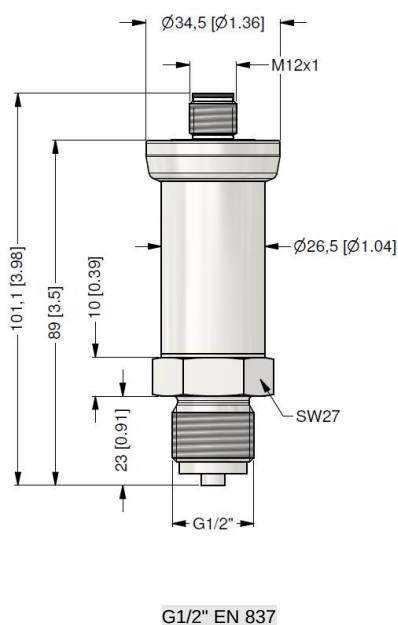

⇒ metric threads and different versions on demand

options

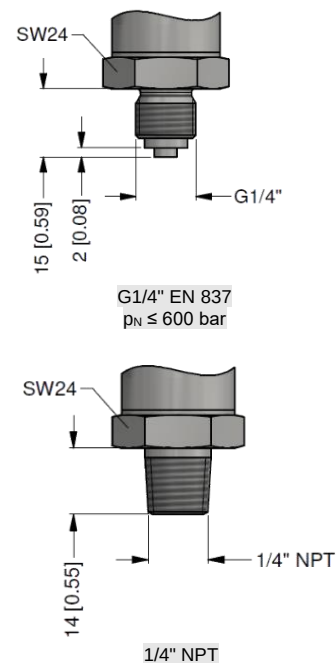

Ordering code **LPT 541**

LPT 541

-

-

-

-

-

-

-

[illegible]

© 2024 DRUCK & TEMPERATUR Leitenberger GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.