



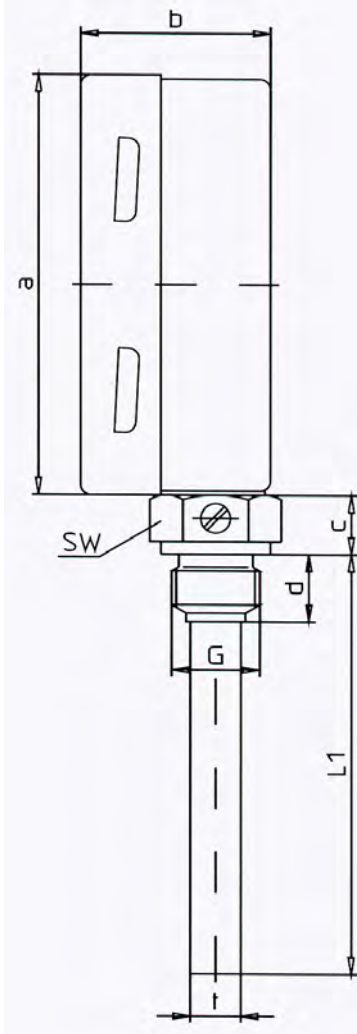
- Case:** Bayonet fitted, stainless steel AISI 304
 Optional: with liquid filling (IP 65)
- Bezel:** Bayonet fitted, stainless steel AISI 304
- Protection class:** IP 54
- Dial:** Aluminium, white varnished
 lettering and graduation black
 Optional: Red mark
 Optional: Imprint
 Optional Double scale °C/°F
- Pointer:** Aluminium, black
 Optional: Silicone damped
- Window:** Instrument glass
 Optional: Perspex window
 Optional: Laminated safety glass
 Optional: Red mark pointer
- Stem:** G 1/2 A stainless steel AISI 303, A/F 27, with fixing screw
 multi part welded, tube Ø 10 mm of AISI 316 Ti
 Optional: Thread of AISI 316 Ti
 Optional: other connections
- Connection:** Vertical entry
 Optional: Sidewards
- Measuring range:** 0-120°C
 Optional: see table below
- Accuracy class:** 1.0
 Optional: Works test certificate



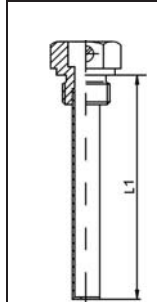
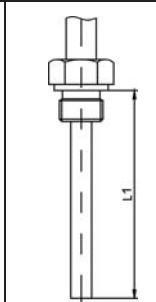
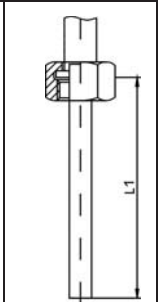
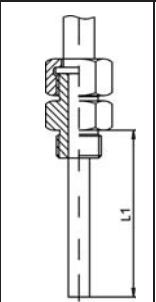
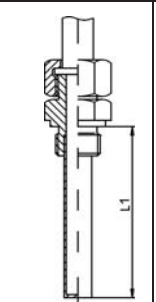
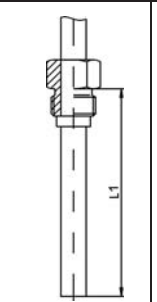
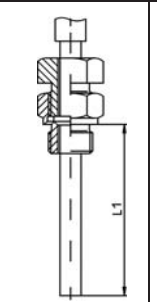
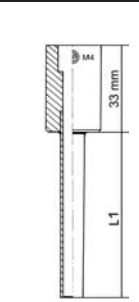
		Type number:				Measuring-range	Graduation		
Diam.:	mm	63	80	100	160				
Stem	28 mm	2660	2680	2700	2760	-40 +40°C -30 +50°C -20 +60°C -20 +40°C -15 +45°C -10 +60°C -10 +50°C 0 -50°C 0 -60°C 0 -80°C	1°		
	45 mm	2661	2681	2701	2761				
	50 mm	2662	2682	2702	2762				
	63 mm	2663	2683	2703	2763				
	80 mm	2664	2684	2704	2764			0 -100°C 0 -120°C 0 -160°C 0 -200°C	2°
	100 mm	2665	2685	2705	2765				
	120 mm	2666	2686	2706	2766				
	160 mm	2667	2687	2707	2767			0 -250°C 0 -300°C	5°
	200 mm	2668	2688	2708	2768				
	250 mm	2669	2689	2709	2769			0 -400°C 0 -500°C 0 -600°C	10°

Other lengths are available!

Stem 28 mm only 0-120°C available!
 Measuring span 50 and 60°C shortest stem = 100 mm max. 200 mm!



Type	a	b	c	d	SW	G	t
2660	63	47	14	14	27	½ A	10
2680	80	46	14	14	27	½ A	10
2700	100	49	14	14	27	½ A	10
2760	160	48	14	14	27	½ A	10

0	1	2	3	4	5	6	9
separate pocket with male thread and fixing screw	fixed connection male thread	union nut female thread	union nut with double nipple male thread	union nut with additional thermowell acc. to DIN 43 772 form 8	turnable male thread	movable clamp connection male thread	separate pocket for welding with fixing screw
							

Dimensions and technical data are conform to current company standard.
 Changes to improve our instruments will be made without preannouncement.