



- Case:** Steel zinced
- Bezel:** Steel nickel plated
- Protection class:** IP 34
- Dial:** Plastic, white with raised edge lettering and graduation black
 Optional: Imprint
 Optional: Double scale °C/°F
- Pointer:** Plastic, black
 adjustable at end of stem
 Optional: Aluminium, black
- Window:** Plastic
 Optional: Instrument glass
- Stem:** G 1/2 B brass detachable with fixing screw
 L = 40 / 63 / 100 mm solid A/F 21
 other lengths multipart soft soldered A/F 21
 Optional: plug-in version
- Connection:** Backwards
- Accuracy class:** 2.0




Measuring range:		0-120°C		
		Type numbers:		
Diam.:	mm	63	80	100
Stem	40 mm	903	906	909
Stem	63 mm	904	907	910
Stem	100 mm	905	908	911
Stem	150 mm	915	916	917


Measuring range:		-20+60°C / -10+50°C / 0-60°C			Please state the measuring range in your order!
		Type numbers:			
Diam.:	mm	63	80	100	
Stem	40 mm	923	926	929	
Stem	63 mm	924	927	930	
Stem	100 mm	925	928	931	
Stem	150 mm	935	936	937	

Measuring range:		-30+50°C / -20+60°C / 0-120°C			Please state the measuring range in your order!
		Type numbers:			
Diam.:	mm	63	80	100	
Stem	50 mm	940	944	948	
Stem	75 mm	941	945	949	
Stem	100 mm	942	946	950	
Stem	150 mm	943	947	951	

Other lengths are available!

Special version:
 Stem with measuring-pot Ø 15
 and plug-in socket.



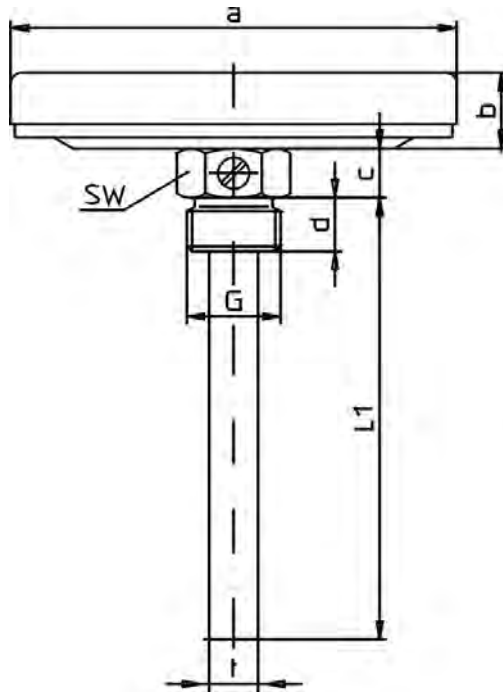

Type	a	b	c	d	SW	G	t
903	63	12	7	12	21	½ B	12
906	80	14	7	12	21	½ B	12
909	100	15	7	12	21	½ B	12

Dimensions and technical data are conform to current company standard.
 Changes to improve our instruments will be made without preannouncement.